



Quam

LOUDSPEAKER ASSEMBLIES

C5/BU/CK1/S

SAPLING® CLOCK BAFFLE

8" O.D. speaker, 5W-25/70V transformer

GENERAL DESCRIPTION


The **C5/BU/CK1/S** is a complete loudspeaker assembly that is compatible with Sapling analog clocks. The assembly consists of an 8C5PAX - 8" O.D. dual cone loudspeaker with a 5 oz. magnet and a TBLU - 5W-25/70V transformer. Clock assembly is **NOT** supplied.

INTENDED USE - Indoor Environment

Installation	Loudspeaker may be oriented above, below, left or right of the clock.
Program Material	Signal Tones, Voice, and Music

AUDIO SPECIFICATIONS

Average Sensitivity	92 dB SPL, 1W/ 1M
Loudspeaker Power Rating	12W RMS, EIA 426A Standard
Calculated Output	99dB SPL, 5W/ 1M
Magnet Type & Weight	BeFe Ceramic, 10 oz. Nominal
Frequency Response	65Hz - 17 kHz EIA 426A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	7" color-coded pigtails, pre-cut

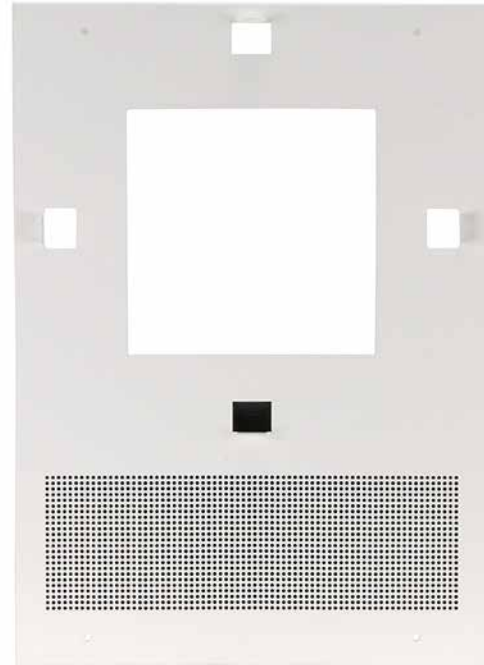


SYSTEM COMPONENTS

Loudspeaker	8C10PAX
Transformer	25/70V 5W-5 tap Color Coded Leads (5W, 2.5W, 1.25W, 0.63W, 0.31W)

RECOMMENDED QUAM COMPONENTS

Surface Mount Enclosure	SE9W
Recessed Mount Enclosure	ES8-CK

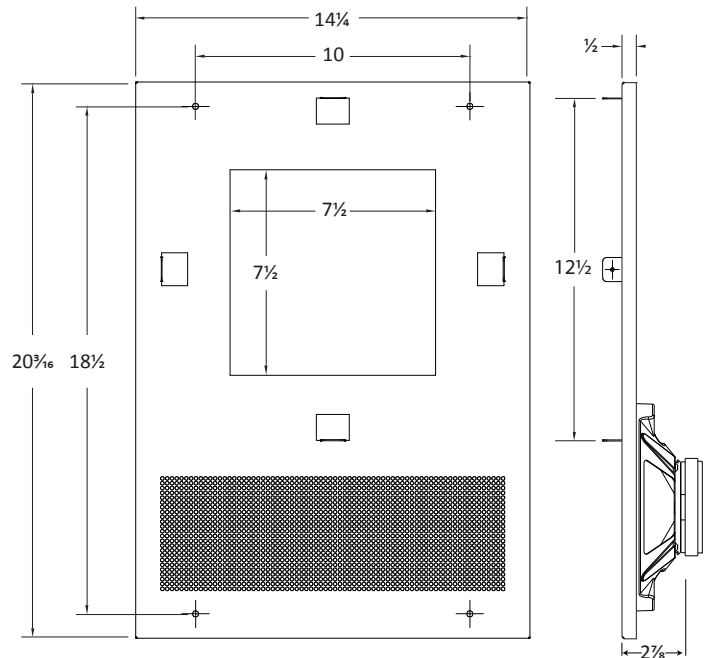

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at: www.QuamSpeakers.com

© 2013 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC.
234 East Marquette Rd.
Chicago, IL. 60637
Tel: 1-800-NEED-NOW (800-633-3669)
Fax: 1-888-NEED-NOW (888-633-3669)
e-mail: NeedNow@QNC.com
www.QuamSpeakers.com